

加油机控制器 Fuel Dispenser Controller



产品功能 Product Features

- 具有锁机功能

具有金额整停功能

具有小数点移位功能，适用于不同国家货币要求

可选配语音报数及打印输出功能
- 可带触摸屏

可带手摇功能

可带多媒体

可接受定制
- 可选配机械累计计数器

留有通讯口，可与油站管理系统连接

可带GPRS功能和手机联网

可带太阳能功能
- Electronic Calibration.
- Function of locking pump.
- Fueling time limit function.
- Can set the decimal point for the display, so can be used in many country with different currency rate.
- Can choose 7 digits for electromagnetic counter or 9 digits for Mechanical totalizer counter.
- Leaves the communication ports, so it can communicate with the gas station management system.
- Can add GPRS function , connect with mobile phone to check data and set unit price anytime anywhere
- Can add solar power function
- Screen touch
- Can add handshake function
- TV medium
- Can do OEM as required

主要技术参数 Technical Specification

适应温度 Adapt To Temperature	-40℃~+55℃
相对湿度 Relative humidity	≤95%
大气压力 Air pressure	86 ~ 106KPa
电压 Power	AC220V ± 20%√ AC380V ± 20% AC110V ± 20%
频率 Frequency	(50 ± 1)HZ√ (60 ± 1)HZ
显示屏显示位数 Number of digits displayed on the display	Volume6位，Amount6位，Unitprice区4位 (664) Volume8位，Amount8位，Unitprice6位 (886)
单次计数范围 Single range	1 ~ 9999.99 ,1 ~ 999999.99(changeable)
单价设定范围 Unit price setting range	0 ~ 9999,0 ~ 999999(changeable)
总累计计数范围 Accumulative range	0 ~ 9999999999.99
电磁阀设置范围 Solenoid valve turn off setting range	0~0.99L

组合叶片泵 WDPBNT/WDPHIB Vane Pump



WDPBNT



WDPHIB

组合叶片泵，内置油气分离器、溢流阀，具有A/B两种的上盖结构，适合连接不同的管路,具有噪音低、流量大、寿命长等特点

WDPBNT/WDPHIB Vane Pump, built in air separator, by pass valve, filter, is with A and B different top covers for different connecting pipes. With the advantage of low noise, high flow rate, long life service, etc.

型号 Model	WDPBNT	WDPHIB
转速 Speed	630RPM	630RPM
流量 Flow Rate	45-65L/min	75-85/Lmin
真空度 Vacuum	0.054MPA	0.054MPA
噪音 Noise	72dB	72dB
工作压力 Working Pressure	1.6-2.0bar	2-2.5bar
包装尺寸 Dimension	35 × 28 × 38cm	35 × 28 × 38cm
净重 Net weight	15kg	15kg
毛重 Gross weight	16kg	16kg
包装 Package	1pcs/CTN	

齿轮泵 WDPTOK Gear Pump



WDPTOK

WDPTOK 齿轮泵,泵体材料：铸铁，用于汽油、煤油、柴油、乙醇汽油等混合性燃油，分为A型和B型两种不同的进口结构。泵体内置了油气分离器、止回阀、溢流阀、出口阀、进口过滤网。

WDPTOK Gear Pump, made by cast iron, is applicable to gasoline, kerosene, diesel and gasohol with A type and B type inlet and Air Eliminator, By pass valve, Check valve, Inlet filter are built in.


型号 Model	WDPTOK
转速 Speed	900RPM
流量 Flow Rate	45-55L/min
真空度 Vacuum	≥ 0.06MPA
噪音 Noise	≤ 72dB
工作压力 Working Pressure	1.8-2.4bar
包装尺寸 Dimension	43 × 32 × 40cm
净重 Net weight	32.5kg
毛重 Gross weight	33.5kg
包装 Package	1pcs/CTN

齿轮泵 WDPTAS Gear Pump

WDPTAS 齿轮泵泵体采用铝合金低压铸造；用于汽油、煤油、柴油等混合性燃油泵体内置了油气分离器、止回阀、溢流阀、减压阀，进口过滤网和出口过滤网

型号 Model	WDPBNT
转速 Speed	680-980RPM
流量 Flow Rate	45-90L/min
真空度 Vacuum	0.06MPA
噪音 Noise	72dB
工作压力 Noise	1.8-3.0bar
包装尺寸 Dimension	36 × 32 × 30cm
净重 Net weight	16kg
毛重 Gross weight	17.5kg
包装 Package	1pcs/CTN

WDPTAS Gear Pump is made by low pressure casting aluminum, for pumping gasoline,kerosene,diesel,etc,with built in oil/gas separator check valve flow control valve,presure reducing valve , inlet strainer and outlet strainer

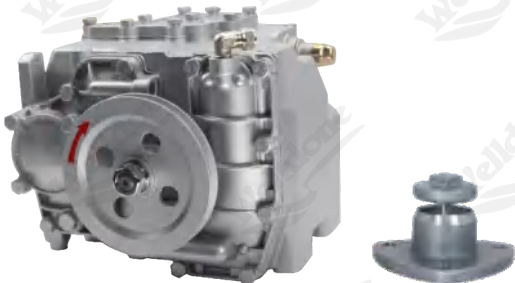

WDPTAS



DC12V/24V防爆泵 DC12V/24V Explosion-proof Pump

型号 Model	DC12V/24V防爆泵
工作电压 Voltage(V)	DC12V or24V
流量 Flow Rate	30-50L/min

流量计 WDFGIL Flow Meter

型号 Model	WDFGIL
流量 Flow Rate	5-60L/min
每转排量 Flow Rate	0.473L
最小可调量 Adjustable Minimum Volume	0.04%
精度 Accuracy	± 0.2%
重复度 Repeatable Tolerance	=0.07%
包装尺寸 Dimension	46 × 28 × 32cm
净重 Net weight	11kg
毛重 Gross weight	12kg
包装 Package	2台/纸箱 2PCS/CTN

流量计 WDFTOK Flow Meter

型号 Model	WDFGIL
流量 Flow Rate	5-60L/min
每转排量 Flow Rate	0.5L
最小可调量 Adjustable Minimum Volume	0.11%
精度 Accuracy	± 0.2%
重复度 Repeatable Tolerance	=0.07%
包装尺寸 Dimension	30 × 27 × 37cm
净重 Net weight	23kg
毛重 Gross weight	27kg
包装 Package	1台/纸箱 1PCS/CTN



WDFGIL



WDFTOK

流量计 WDFBNT Flow Meter


机体材料：铝合金
本机结构：不锈钢缸套，四活塞行程外机新颖，机体小，强度高，耐磨性好，计量准确，使用寿命长. WDFTAS流量计内置智能传感器，100脉冲和60脉冲可供选择

Fow meter,is made of alloy aluminum,with construction of stainless steel bush and four pistons positive displacement. Novel appearance, small size,high reliability,good wear resistance,precise measure,long life flow meter is built in intelligent pulse sensor,60pulses or 100pulses for option.

型号 Model	WDFTAS	WDFTAS1	WDFBNT
流量 Flow Rate	5-90L/min	5-90L/min	5-60L/min
每转排量 Discharge Rate Per Revolution	0.5L	0.5L	0.5L
最小可调量 Adjustable Minimum Volume	0.07%	0.07%	0.05%
精度 Accuracy	± 0.2%	± 0.2%	± 0.2%
重复度 Repeatable Tolerance	=0.07%	=0.07%	=0.07%
包装尺寸 Dimension	50 × 30 × 35cm	50 × 29 × 32cm	50 × 29 × 24cm
净重 Net weight	11kg	10kg	10kg
毛重 Gross weight	12kg	11kg	10.5kg
包装 Package	2台/纸箱 2PCS/CTN		



WDFBNT



WDFTAS1



WDFTAS

大流量流量计 WDFHIB High Flow Flowmeter

高流量流量计采用先进的技术，广泛应用于不同的加油机。该产品具有使用寿命长、精度高、结构坚固等优点。它是加油机零件的最佳选择。
High Flow Flowmeter adopts advanced technology, which can be widely used for different fuel dispensers. This product has advantages as long using term, high precision, firm structure etc. It can be the best choice of gasoline dispenser component.



WDFHIB

主要技术参数 Technical Specification	
每转排量 Discharge Rate of Each Revolution	1L
轴向旋转方向 Rotary Direction Of Axial	CW
水平方向 Level	256mm
垂直方向 Vertical	254mm
流量范围 Flow Range	5 ~ 160L/min
工作压力 Working Pressure	0.12MPa ~ 0.35MPa
精度 Accuracy	± 0.2%
重复错误 Repeat Error	≤0.1%
工作寿命 Working Life	≥ 10000000L

工艺先进，动作精确可靠，寿命长.主阀膜片采用进口特制橡胶，强耐腐蚀，耐低温-40℃ 磁路部件采用特种不锈钢磁性材料，永不生锈或产生剩磁线圈部件采用F级漆包线，绝缘性能优良

防爆等级：EXD II BT4 当工作压力在0.3-0.4MPa时，关闭主阀 小流量为3-3.5L/MIN

Precise action, reliable, long service. Diaphragm of main valve has capability of anti-corrosion and resisting -40℃ low temperature. Special stainless steel magnetic material never rusts and generates remanent magnetism Class floop with good insulation

Ex mark :EXD II Bt4 When main valve shuts off, working pressure 0.3-0.4MPa, flow rate is 3-3.5L/min

主要技术参数 Technical Specification					
直径 Diameter	20mm	25mm	40mm	中等 Medium	汽油、柴油、煤油 Petrol, diesel, kerosene
大流量 Big flow L/min	≥ 50	≥ 100	≥ 250	额定电压 Rated voltage	AC220V/50HZ AC230V/60HZ
小流量 Small flow L/min	2.5~5.5	3.5~6.5	3.5~6.5		AC110V/50HZ AC115V/60HZ
				额定功率 Rated power	DC24V 2 × 7W
压力 Pressure	0.35MPa			温度 Temperature	-35℃~+55℃

使用条件 Using condition

高度 Height: ≤2000m

温度 Temperature: -35℃ ~ +55℃

湿度 Humidity: ≤95% (+25℃)

没有震动和撞击的地方 no shaking and impact place.

在额定电压85%~110%范围内灵活，可正常关闭 Flexible in the rated volt 85%~110% range, it can shut off normally.



型号 Model	WDF20A	WDF40
包装尺寸 Dimension	45 × 42 × 18cm	49 × 42 × 15cm
净重 Net weight	20kg	20kg
毛重 Gross weight	21.5kg	18kg
包装 Package	15pc/CTN	10pcs/CTN
公称直径 Diameter	20mm/ 3/4"	40mm/ 1.5"
连接方式 Connection	Flange	Thread M33 × 1.5
流量 Flow rate(L/min)	50	250
工作压力范围 Working pressure(bar)	0.35-4.5Bar	0.35-4.5Bar
工作电压 Voltage(V)	AC220V 50HZ DC24V/12V	AC220V 50HZ DC24V/12V
环境温度 Ambient Temperature(℃)	-40℃~55℃	-40℃~55℃
介质温度 Prdout temperature(℃)	-40℃~65℃	-40℃~65℃

WDAN11A(D) Automatic Nozzle



WDAN11A(D)

WDAN11A(D)自封油枪枪体材料为铸铝在设计时充分考虑到顾客的需求，具有小巧，轻便，易用，可靠性高，耐用等特点。

WDAN11A(D)Automatic Nozzles are made of alloy aluminum and, designed with today's customer in mind.Small,trim,light weight,easy and convenient to use.

WDAN11A1 Automatic Nozzle



WDAN11A1

WDAN11A1 油枪是WDAN11A1油枪改进型油枪。在设计时充分考虑到农场和家庭用户的要求，具有流量大，方便悬挂等特点，更加适合配套电动油泵在农场和家庭使用。

WDAN11A1 Automatic nozzle is improved from WDAN11A1 nozzle, designed with Farm&home customers in Mind, with advantage of high flow rate, easy hung.it is idea nozzle for electric transfer pump on farm and home use.

WDAN11B Automatic Nozzle



WDAN11B

WDAN11B自封油枪流量控制准确，专为预付款式自助服务和卡式设计，能防止溢油、盗油。当泵油系统加压到一定程度，油枪才可以开启；当没有压力时，油枪自动关闭。

WDAN11B Automatic Nozzles are designed specially for self-service pre-pay of card-lock system to help prevent gasoline spills.The WDAN11B can not be opened until the pumping system is pressurized and closes automatically when the pressure is removed. This means the WDAN11B is closed when placed back to the dispenser. Accurate flow control allows your customers to top off their tank to the exact amount they want,and it's easy to stop gasoline flow precisely.

WDAN120Automatic Nozzle



WDAN120

大流量，适用于大货车，巴士等加油低成本，长寿命，经久耐用能帮助你提高工作效率，增加利润

Heavt-duty high-flow nozzle for fueling to truck,bus Low cost,long life and durability High flow nozzle can help increase your productivity,sales and profits.

型号 Model	WDAN11A(D)	WDAN11A1	WDAN11B	WDAN120
进口 Inlet	BSPT/NPT 3/4"	BSPT/NPT 3/4"	BSPT/NPT 3/4"	BSPT/NPT 1"
枪嘴外径 Diameter of spout	13/16"&15/16"	21MM	13/16"&15/16"	17/16"&19/16"
枪套颜色 Color of insulator	红/绿/蓝/黄/黑 red/green/blue/yellow/black 可定制 OEM			
包装尺寸 Dimension	42 × 34 × 37cm	42 × 34 × 40cm		
净重 Net weight	12kg	12kg	12kg	15kg
毛重 Gross weight	13kg	13kg	13kg	16kg
包装 Package	10pcs/CTN			

WDTN Automatic Nozzle



枪嘴一体化设计，避免了在长期加油中枪嘴松动，出现的漏油主阀采用二级密封，避免油压过高开枪困难,加油时，一只手就可以完成三档控制，得心应手

whole Spout to avoid leakage after service long time.The main valve is sealed in two layers to avoid being difficult to run the nozzles when working pressure is too high.The nozzle can be controlled in three grades only with one hand.

主要技术参数 Technical Specification	
进口 Inlet	BSPT/NPT 3/4"
枪嘴外径 Diameter of spout	13/16"&15/16"
枪套颜色 Color of insulator	红/绿/蓝/黄/黑 red/green/blue/yellow/black 可定制 OEM
包装尺寸 Dimension	42 × 34 × 40cm
净重 Net weight	12kg
毛重 Gross weight	13kg
包装 Package	10pcs/CTN

WDZA13A/ WDZA120 Automatic Nozzle

WDZA13A/ WDZA120 自封油枪结构更加紧凑，外观小巧美观，压力损失少，流量大；准确的流量控制，用户可以按照他们需要精确加油。WDZA13B 油枪产品可靠、重量轻、小巧，密封区采用一体式结构，降低了工作压力，减少漏油的机率，具有枪嘴水平自动关枪功能，无压自封功能供选择

Compact structure,cute appearance,low pressure loss and high flow rate .Accurate flow control allows your customers to fuel their tank to the exact amount they want,and it ' s easy to stop gasoline flow precisely.Reliable products,slim design,light weight and customer friendly .Integrated construction in the seal reduces working pressure and avoids leakage with function of automatic shut-off when spout points to horizon .Auto no-pressure shut-off is optional.



WDZA13A



WDZA120

型号 Model	WDZA13A/WDZA13B	WDZA120
进口 Inlet	BSPT/NPT 3/4"or 1"	BSPT/NPT 1"
枪嘴外径 Diameter of spout	13/16"&15/16"	19/16"
枪套颜色 Color of insulator	红/绿/蓝/黄/黑 red/green/blue/yellow/black	可定制 OEM
包装尺寸 Dimension	42 × 34 × 37cm	42 × 34 × 40cm
净重 Net weight	12kg	15kg
毛重 Gross weight	13kg	16kg
包装 Package	10pcs/CTN	

油枪 Nozzle

WDAN40/WDAN50



WDAN40



WDAN50

型号 Model	WDAN40	WDAN50
进口 Inlet	BSPT/NPT 1.5"	BSPT/NPT 1.5" or 2"
枪嘴外径 Diameter of spout	38mm	42mm
流量 Flow rate	260L/min	300L/min
包装尺寸 Dimension	37 × 37 × 57cm	46 × 37 × 40cm
净重 Net weight	23kg	16kg
毛重 Gross weight	25kg	17kg
包装 Package	10pcs/CTN	5pcs/CTN


WDAN60



型号 Model	WDAN60
进口 Inlet	BSPF3/4"、BSPF1"、BSPT3/4"、BSPT1"、NPT3/4"、NPT1"
出口 Outlet	15/16"
流量范围 Flow rate	0~60L/min
工作压力 Work Pressure	0.18~0.22Mpa
包装 Package	20pcs/carton
尺寸 Dimension	61.5 × 41.5 × 37.5cm
总重量 Gross Weight	28kg
净重 Net weight	24kg

WDAN60

型号 Model	WDAN40	WDAN50
进口 Inlet	Φ 19	Φ 19
流量 Flow rate	37L/min	37L/min
净重 Net weight	0.2kg	0.2kg

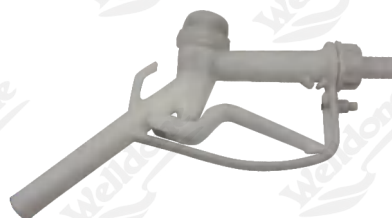

WDAN20



WDAN20A

WDANSS 不锈钢油枪



WDANSS 不锈钢油枪，全不锈钢设计，用于加注尿素。
WDANSS Stainless steel nozzle, made by stainless steel, designed for Adblue Urea

WDJM Nozzle



流量计油枪在手动油枪的基础上安装了带LCD显示的电子椭圆齿轮流量计，具有精度高达 $\pm 0.5\%$ 、重量轻、使用方便、5位数单次加油量和8位不可复位总累计等优点。

流量：50-60L/min 入口：BSP或NPT 喷口直径：13/16"
精度： $\pm 0.5\%$ 重复性：0.2%

WDJM Meter Nozzle is installed electronic oval gear meter with LCD display on base of manual nozzle, with advantage of high accuracy up to $\pm 0.5\%$, low weight, easy use and 5 digital Sub-total and 8 digital Non-resettable totalizer, etc.

Flow Rate: 50-60L/min Inlet: BSP or NPT Diameter of Spout: 13/16"
Accuracy: $\pm 0.5\%$ Repeatability: 0.2%

WDJYQ Oil Nozzle



WDJYQ 机油枪与椭圆齿轮流量计相结合，采用铝合金枪体，内置平衡阀来降低对扳机的压力，自带旋转接头

出口：BSP 1/2" 最大流量：15L/min
工作压力：0.7MPa 最大工作压力：10MPa

WDJYQ oil nozzle is easily combined with Oval gear meter to measuring the dispensing of oil, with the construction of aluminum body swivel, a in-built balanced valve.

Outlet: BSP 1/2" Max. Flow Rate: 15L/min
Working Pressure: 0.7MPa Max. Working Pressure: 10MPa

WDMN Nozzle



WDMN测量油枪通过流量计和油枪连接，适用于测量通过管道的液体（柴油，机油，压力油等）的体积，也适用于汽油和各种轻质油灌装。

WDMN measuring nozzle is connected by flowmeter and nozzle, It is fit for testing the volume of the liquid (diesel, engine oil, pressured oil and so on) which through the pipeline. Also it can fit for petrol and such kind of light oil filling.

油枪套 WDNH Nozzzle Holder

导静电式加油机专用胶管 The hose with wire is special used in fuel dispenser



WDNH50



WDNH50P



WDNH150P



WDNH50B



WDNH60P



WDNH200

型号 Model	WDNH50	WDNH50B	WDNH200	WDNH50P	WDNH60P	WDNH150P
材料 Material	铝 Cast Aluminum			塑料 Reinforced nylon		
包装尺寸 Dimension	45 × 42 × 40cm		64 × 41 × 45cm	59 × 43 × 46cm		64 × 41 × 45cm
净重 Net weight	12kg	11kg	12kg	14kg	14kg	14kg
毛重 Gross weight	13kg	12kg	13kg	15kg	15kg	15kg
包装 Package	20pc/CTN		12pc/CTN	20pc/CTN		12pc/CTN

加油机油管 Fuel Hose

尺寸 Size :

1/2", 3/4", 1", 1.5", 2", 3", 4" Other size as required 尺寸按需定制

颜色 Colours :

黑色, 绿色, 蓝色, 黄色, 红色 black, green, blue, yellow, red



传感器 Pulser

主要技术参数 Technical Specification	
电压 Voltage	± 5DC
包装尺寸 Dimension	42 × 34 × 40cm
净重 Net weight	12kg
毛重 Gross weight	13kg
包装 Package	30pcs/CTN



传感器 WDSS Pulser


60脉冲或100脉冲输出供客户选择，也可以根据客户要求定制输出波形。
60 and 100 pulses available,output signal as required.

主要技术参数 Technical Specification	
电压 Voltage	± 5DC
包装尺寸 Dimension	42 × 34 × 40cm
净重 Net weight	12kg
毛重 Gross weight	13kg
包装 Package	30pcs/CTN




输出波形 Output waveform


模式一 A型
Model-1 A type




模式二 B型
Model-2 B type



模式三 C型
Model-3 C type



模式四 D型
Model-4 D type



过滤器系列 Filter series



型号 Model	WDF4-A/D 过滤器座Filter Holder	WDF4-T 过滤器座Filter Holder	WDF4-F 过滤器座Filter Holder	WDF4 过滤器Filter	WDF4SS 过滤器Filter
材料 Material	铝Aluminum	铝Aluminum	铝Aluminum	——	——
进口 Inlet	BSPT/NPT 1"	BSPT/NPT 1"	Flange	——	BSPT/NPT 1"
出口 Outlet	BSPT/NPT 1"	BSPT/NPT 1"	Flange	——	BSPT/NPT 1"
过滤网螺纹 Filter thread	UNF1"~12	UNF1.5"~16	UNF1.5"~25	UNF1"~12	——
包装尺寸 Dimension	31 × 33 × 23cm	44 × 50 × 15cm	44 × 50 × 15cm	49 × 40 × 30cm	51 × 25 × 37cm
净重 Net weight	13kg	13kg	13kg	20kg	17kg
毛重 Gross weight	14kg	14kg	14kg	21kg	18kg
包装 Package	50pcs/CTN	50pcs/CTN	50pcs/CTN	20pcs/CTN	12pcs/CTN

防爆电机 Explosion Proof Motor

WDMAL /WDMSB防爆电机适用于填充燃气的场所，适用于汽油机、柴油机、防爆风机、防爆泵等动力系统。

WDMAL /WDMSB Explosion Proof Motor with steel plate housing,with Aluminum Hosing Suitable for the place where filled with burning gas and air, apply to the power system of petrol machine, diesel, explosion-proof fan and explosion-proof pump.



WDMAL



WDMSB



WDMAL-1

型号 Model	功率 Power		电压 Voltage (V)	电流 Current (A)	转速 Speed (r/min)	频率 Frequency (Hz)	额定转矩 Rated Torque
	HP	KW					
WDMAL01	1	0.75	380	1.8	1400-1700	50/60	10.5
WDMAL02	1.5	1.1		2.5			10.5
WDMAL03	3/4	0.55		1.6			20.0
WDMSB01	3/4	0.55	220	4.0	1425-1725	50/60	1.8
WDMSB02	1	0.75		5.1			1.8
WDMSB03	1.5	1.1		6.5			1.7

拉断阀 Breakaway valve

用于油管和加油机之间，内置止回阀，一次性使用。

拉力过大时，自动断裂，同时自动关闭，防止燃油外溢。

WDBV1/WDBV2 Breakaway built with check valve are used for connecting the hose and the dispenser , single use . When the pull is too strong,the breakaway will be broken and closed automatically to avoid the fuel flowing.



WDBV3



WDBV1



WDBV2

型号 Model	WDBV1	WDBV2	WDBV3
螺纹 Thread	BSP/NPT	BSP/NPT	BSP/NPT
直径 Diameter	3/4"&1"	3/4"&1"	3/4"&1"
最大拉力 Max.Pull	800-15000N	800-15000N	800-15000N
流量范围 Flowrange	1":0-90L/min 3/4":0-60L/min	3/4":0-60L/min	1":0-90L/min 3/4":0-60L/min
包装尺寸 Dimension	1":29 × 29 × 29cm 3/4":27 × 27 × 27cm	29 × 27 × 27cm	1":29 × 29 × 29cm 3/4":27 × 27 × 27cm
包装 Package	50pcs/CTN	50pcs/CTN	50pcs/CTN



WDES0V1



WDES0V0

紧急切断阀 Emergency Shut-off Valve

用于汽油、柴油、煤油 Used for gasoline,kerosene,diesel oil,etc.

主要技术参数 Technical Specification					
工作压力 Working pressure	0.2MPa	提升阀 Poppet valve	Single	净重 Net weight	25kg
脱离速度 Valve closing speed	0.5S	进出口螺纹 Inlet & outlet	BSPF/NPT "	毛重 Gross weight	26kg
工作温度 Working temperature	-30-55℃	螺纹 Thread Male	Female	包装 Package	10pcs/CTN
流量范围 Flow range	120L/min	包装尺寸 Dimension	41x35x25cm	尺寸 Size	1.5 " or 2 "

油管接头 WD Hose Swivel

WD-1 系列不可旋转油管接头，用于连接油管。
WD-2 系列可旋转油管接头，用于连接油管，可360° 旋转，方便加油。
WD-1 Unrotary swivels used for connecting the nozzle and the hose.
WD-2 Rotary swivels,used for connecting the nozzle and the hose,360° swivel action.



WD-1



WD-1-1



WD-1-1A



WD-2



WD-2-1



WD-2-1A

型号 Model	WD-1呆接头	WD-1-1新型呆接头	WD-1-1A变径呆接头	WD-2活接头	WD-2-1新型活接头	WD-2-1A变径活接头
直径 Diameter	3/4"-2"	3/4"-2"	3/4"&1"	3/4"-2"	3/4"-2"	3/4"-1"
螺纹 Thread	NPT/BSP/BSPF					
包装 Package	50pcs/CTN&100pcs/CTN					

WD-3 系列油枪后接头，用于油枪
WD-3 Swivels used for Nozzle

WD-3-4系列胶管接头，用于油枪后接头
WD-3-4 Swivels used for WD-3 Swivels



WD-3



WD-3-1



WD-3-2



WD-3-3



WD-3-4



WD-3-5

型号 Model	WD-3 WDZA后接头	WD-3-1半铜半铝	WD-3-2两个O形圈	WD-3-3三个O形圈	WD-3-4变径后接头	WD-3-5全铝
直径 Diameter	3/4"&1"	3/4"&1"&5"	3/4"&1"	3/4"&1"	3/4"&1"&1.5"	3/4"&1"&1.5"
螺纹 Thread	NPT/BSP/BSPF					
包装 Package	50pcs/CTN&100pcs/CTN					

万向接头 WDSW Swivel

WDSW1/3系列万向接头，用于用于连接油管和油枪，可180° 旋转，方便加油。
WDSW1/3 Swivels used for connecting the nozzle and the hose,180° swivel action.
WDSW2/4系列万向接头，用于用于连接油管和油枪，可360° 旋转，方便加油。
WDSW2/4 Swivels used for connecting the nozzle and the hose,360° swivel action.

主要技术参数 Technical Specification	
直径 Diameter	3/4"-1" 可定制 Customizable
螺纹 Thread	NPT/BSP/BSPF
最大拉力 Max.Pull	50pcs/CTN



WDSW1



WDSW3



WDSW2



WDSW4

止回阀 WDACV Angle Check Valve

用于汽油、柴油、煤油 Used for gasoline,kerosene,diesel oil,etc.

型号 Model	WDACV角度止回阀
直径 Diameter	1.5" & 2"
螺纹 Thread	NPT/BSP/BSPF
包装 Package	20pcs/CTN



WDACV

视油镜 WDSYQ Series Oil Indicator



WDSYQ-1



WDSYQ-2



WDSYQ-4



WDSYQ-5

型号 Model	WDSYQ-1	WDSYQ-2	WDSYQ-4	WDSYQ-5
材料 Material	铸铁 cast iron	铸铁 cast iron	铝合金AL-Alloy	铝合金AL-Alloy
进出口螺纹 Inlet&Outlet	进口Inlet : M33 × 1.5 出口Outlet : BSPF/NPT3/4"	BSPF/NPT 1"	BSPF/NPT 3/4"	进口Inlet : M33 × 1.5 出口Outlet : BSPF/NPT3/4"
包装尺寸 Dimension	42 × 35 × 35cm	50 × 29 × 36cm	50 × 29 × 32cm	50 × 29 × 36cm
净重 Net weight	20kg	27kg	24kg	19.5kg
毛重 Gross weight	21kg	27kg	26kg	20.5kg
包装 Package	20pc/CTN	200pc/CTN	200pc/CTN	50pc/CTN

铜底阀 WDFV Foot Valve

用于汽油、柴油、煤油 Used for gasoline,kerosene,diesel oil,etc.

其他尺寸需特别定制 Other size need special produce

主要技术参数 Technical Specification	
脱离速度 Valve closing speed	0.5s
工作温度 Working temperature	-30~55° C
螺纹 Thread	BSPF/NPT 1.5"/2"
包装尺寸 Dimension	37 × 31 × 18cm
净重 Net weight	21kg
毛重 Gross weight	22kg
包装 Package	20pcs/CTN
材料 Material	铜 Brass



铜底阀 WDFV Foot Valve

波纹管 Flexible Pipe



WDFP-A



WDFP-T



WDFP-F



WDFP-SS

型号 Model		铜底阀WDFV Foot Valve
材料 Material		不锈钢 Stainless Steel
尺寸 Size		1" ， 1.5" ， 2" ， 3" 其他尺寸需特别定制 Other size need special produce
长度 Length		按需定制 As required


防爆盒 Junction Box WDJB



3通防爆盒 3-Port



5通防爆盒 5-Port

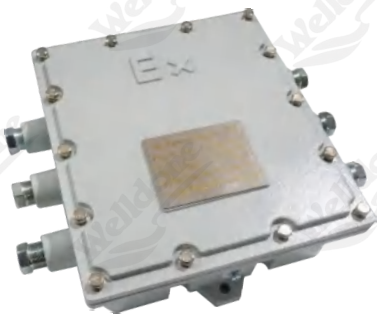

6通防爆盒 6-Port



8通防爆盒 8-Port



拉绳器 WDHR Hose reel

尺寸Size : +3/4" , 1" , 1.5"



不锈钢卷盘
Stainless steel reel



1.5"~2"卷盘
1.5"~2" reel



1/2"~1"卷盘
1/2"~1" reel



3/4~5"电动卷盘
3/4~5" electric reel

测量桶 WDBJL Measuring Can



1L,2L,5L,10L,20L,50L,100L,200L
WITH HAND HOLDER 手提式

材料Material : 不锈钢 Stainless steel 304 、碳钢 cast steel



WITH BOTTOM VALVE 带底阀式



WITH BOTTOM VALVE 带底阀式

ABOUT US

关于我们



我们是生产加油(加气)站设备,在氢能源,液化天然气,压缩天然气,液化气,燃油,尿素,充电桩,家用储能设备,工商业储能设备都有很大的发展和成果。如果你也是同道中人,如果你也对新能源感兴趣。欢迎来到汇洋能源! 我们拥有多项认证,如ISO、CE、ATEX、PED、TUV、PEI、CPA、CMA、防爆认证等。我们拥有自己的专利和版权。愿我们的产品,我们的服务,能留在您深深的脑海里。最好的质量,最好的服务和最优惠的价格,是我们的服务宗旨。期待您的光临!

We are the gas station equipment supplier in Hydrogen Energy, Liquid Natural Gas, Compressed Natural Gas, Liquid Petrol Gas, Fuel, Adblue, EV Charger, Home Energy Storage, Industrial Energy Storage area.

If you are doing the same range business, if you are interested in new energy, welcome you to visit us!

We have many certificates like ISO, CE, ATEX, PED, TUV, PEI, CPA, CMA, Explosion proof certificates and so on. We have our own Patent and copyrights.

Wish our products, our service can give you a strong impression.

Well Quality We Done! Well Service We Done! Well Price We Done!

We are WELLDONE GROUP.



CNG DISPENSER CE



LNG DISPENSER CE



FUEL DISPENSER CE



LPG DISPENSER CE



LNG DISPENSER
EXPLOSION PROOF



CNG DISPENSER
EXPLOSION PROOF



RADIOGRAPHIC
EXAMINATION REPORT



EV CHARGER TUV

HONORARY CERTIFICATE



LNG DISPENSER ATEX



MOBILE GAS
STATION ATEX



FUEL DISPENSER ATEX



SUBMERSIBLE TURBINE
PUMP ATEX



LNG DISPENSER PED




JUNCTION BOX ATEX



ABBLUE DISPENSER CE



POSITIVE DISPLACEMENT
METER CE



MASS METER ATEX



MOBILE GAS STATION CE



PEI MEMBER CERTIFICATE



FACTORY ISO



FACTORY ISO



COPYRIGHT



PQR TEST REPORT



PATENT CERTIFICATES FOR
MANAGEMENT SYSTEM



CNG DISPENSER PAC



LNG DISPENSER PAC

Welldone 汇洋能源



3D Show



Video account



Douyin



WeChat public account



E-BOOK

Add: No.5 Weiye East Road, Longwan, Wenzhou, Zhejiang, China

Fax: +86-577-21828482

WhatsApp: +86-15825667273

Email: contact@hydispenser.com

Email: sales@welldonemachine.com

Youtube: Welldone Machine

Instagram: Welldone Machine

Twitter: @Welldone Machine

Website: www.hydispenser.com

Tel: +86-577-21828499

Skype: cute-room

Facebook: Huiyang Energy

Facebook: WelldoneMachine

Website: www.wdmachine.com